

Service News

Vol.55

Parts list will save you trouble of choosing the parts you need!

When requesting parts of our product, do you have trouble checking the part name and replacement time?



We have created a parts list that contains all the major parts used in our product (auxiliary boiler, composite boiler and incinerator) and drawings showing their mounting locations in one place. By using this sheet to identify and request parts without having to open drawings or operation manuals, we expect to reduce your time and effort.

For details on the specifications of the parts, please provide the ship number or the product's serial number and our staff will look it up for you. Also, the parts list is in Excel format, so you can use it on your computer. The list includes the quantity of part used, required situation, standard delivery time, replacement cycle, possible troubles, and the drawing number and part number of the target part drawing. Please use this list when necessary, such as when requesting parts before docking.


HB/Parts List

ver.1.1

Vessel Name		MFD NO.									
Parts Name	Work Quant	Item	Do	Crit	Draw	Part	Lead T	Replacement (Year)	Trouble	Req	
MAIN BURNER COMPLETE	1	○	○		①	1	1.5 months	2.5	Miss fire		
FLAME PIPNEL	1		○		①	2	1 month	when overhaul	Black smoke		
FIRST DIFFUSER	1		○		①	3	1 month	5	Black smoke		
MAIN DIFFUSER	1		○		①	4	1 month	5	Black smoke		
NOZZLE TIP FOR PILOT	1	○	○		①	5	Stock	3-12M	Miss fire		
CUT OFF VALVE FOR PILOT	1	○	○		①	5	Stock	3-12M	Miss fire		
SPARK ROD	1	○	○		①	6	Stock	2.5	Miss fire		
RD FAN MOTOR	1			○	②	7	6 months	10	PDF trip		
RD FAN IMPELLER	1			○	②	8	2.5 months	2.5 (90,000 bmin)	PDF trip		
FLOW CONTROL VALVE	1		○		③	9	Stock	5	Black smoke		
CAR MOTOR	1		○	○	③	10	Stock	5	Black smoke		
SOLENOID VALVE (NO)	1	○			③	11	Stock	5	Miss fire		
SOLENOID VALVE (NC)	1	○			③	12	Stock	5	Miss fire		
FLAME EYE	1	○	○	○	③	13	Stock	5	Miss fire		

● Pinch in and out for the detail of drawings

① Burner

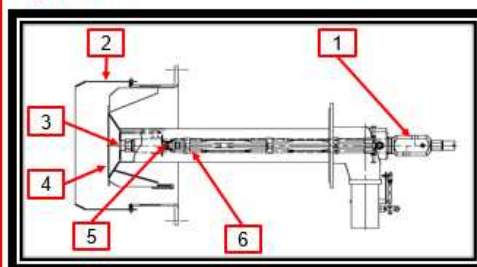

If you have any questions, please contact the nearest MIURA office.